



MORE LIGHT

JOLD-50-CPBN-1L | JOLD-55-CPFN-1L

Open heat sink diode lasers: cw, passively cooled | with collimation

Design 215507226

Design 215507126

Features

- High optical output power up to 55 W cw after collimation
- Wavelengths: 808, 880, 915, 938 and 976 nm
- High efficiency, low divergences
- Long lifetime > 20,000 h, high reliability

Applications

- Pumping of solid-state lasers
- Print applications
- Medical applications


Open heat sink diode lasers | cw, passively cooled | with collimation

JOLD-50-CPBN-1L | JOLD-55-CPFN-1L

Specifications (start of life)	JOLD-50-CPBN-1L Design 215507226					JOLD-55-CPFN-1L Design 215507126					
Operation Mode	cw/pulsed										
Max. Optical Output Power after Collimation	50	50	50	50	50	55	55	55	55	55	W
Center Wavelength at 25 °C	808	880	915	938	976	808	880	915	938	976	nm
Center Wavelength Variation at 25 °C	4	3	5	5	5	4	3	5	5	5	nm
Typical Spectral Bandwidth (FWHM)	3	3	3	3	3	3	3	3	3	3	nm
Maximum Spectral Bandwidth (FWHM)	5	5	5	5	5	5	5	5	5	5	nm
Typical Operation Current	59	60	60	60	64	59	60	60	60	64	A
Maximum Operation Current	65	66	66	66	70	65	66	66	66	70	A
Typical Threshold Current	10	9	6	6	6	10	9	6	6	6	A
Maximum Threshold Current	13	12	9	9	9	13	12	9	9	9	A
Typical Slope	1.05	1.00	0.95	0.95	0.90	1.15	1.10	1.05	1.05	0.95	W/A
Minimum Slope	0.90	0.85	0.80	0.80	0.75	1.00	0.95	0.90	0.90	0.85	W/A
Maximum Operating Voltage	2.0	2.0	1.8	1.8	1.8	2.0	2.0	1.8	1.8	1.8	V
Fast Axis Divergence (Full Power)	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	°
Slow Axis Divergence (Full Power)	< 4	< 4	< 4	< 4	< 4						°
Typical Slow Axis Divergence FWHM						6	6	6	6	6	°
Typical Slow Axis Divergence 86 %						7	6	7	7	7	°
Typical Slow Axis Divergence 95 %						9	7	9	9	9	°
Anode, Cathode Connectors	Threads 4-40 UNC-2B, 6-32 UNC-2B										
Operation Conditions	Cleanroom class ISO 5, non-condensing atmosphere										
Expected Lifetime	> 20,000 h (constant current), partly under qualification										
Cooling											
Mounting	Via thermally conductive foil (thickness 25 ... 100 µm) on cooled surface (water cooled plate or TEC)										
Note	Do not mount via any paste-like media!										
Operation Temperature	15 ... 30 °C, measured with temperature sensor in heat sink										

See general user information!

Options on request: 88x nm; for additional designs or specifications please visit our website: www.jenoptik.com

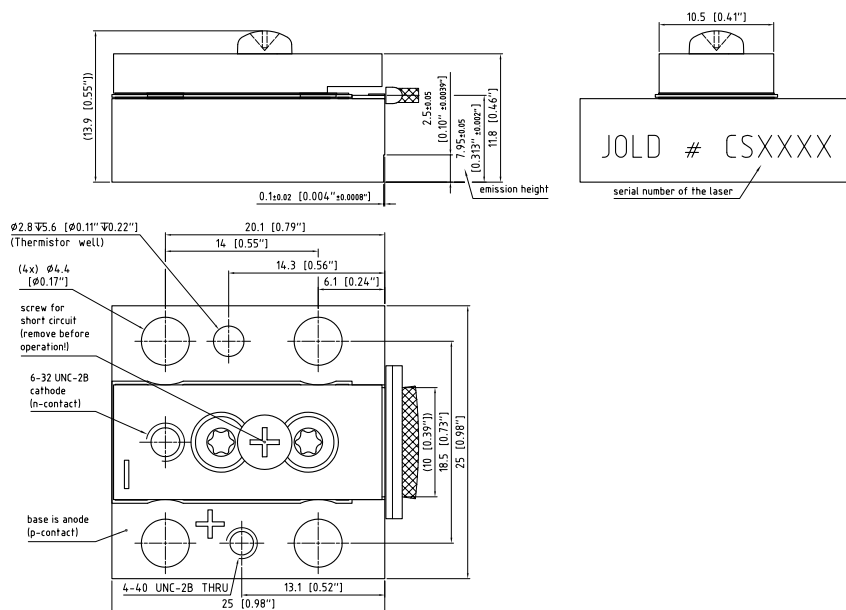

Design 215507126