



F-Theta JENar™ APTALine™ Lens

High Power Lens – JENar™ APTALine™ 103-355-71-AL

Parameters	JENar™ APTALine™ 103-355-71-AL Fused silica lens
Focal length:	103 mm
Wavelength:	355 nm
Scan field (X x Y); Ø:	(50 mm x 50 mm); 71 mm
Diagonal scan angle:	± 20.1°
X/Y mirror angle:	± 7.2°
Back working distance:	134.85 mm
Flange focus distance:	176.95 mm
Input beam Ø 1/e ² :	9 mm
Focus size Ø 1/e ² :	8 µm
a1 a2:	14 mm 46.5 mm
Telecentricity (only F-Theta with scanner):	2.4° 2.8°
Group delay dispersion (GDD)*:	5670 fs ²
LIDT coating pulsed; CW:	0.8 J/cm ² * (τ/[ns]) ^ 0.40; 0.8 MW/cm ²
LIDT system pulsed; CW:	0.8 J/cm ² * (τ/[ns]) ^ 0.40; 0.8 MW/cm ²
Weight:	0.7 kg
Order Number:	739988*


*Please note: Order number was changed. Previous one was 689627.

Spot properties

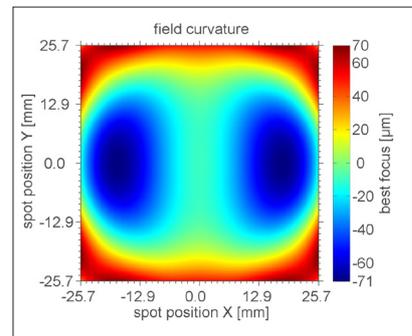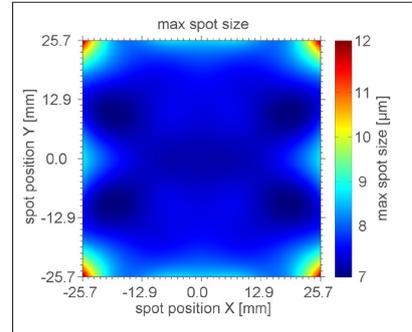


Specifications

JENar™ APTALine™ 103-355-71-AL

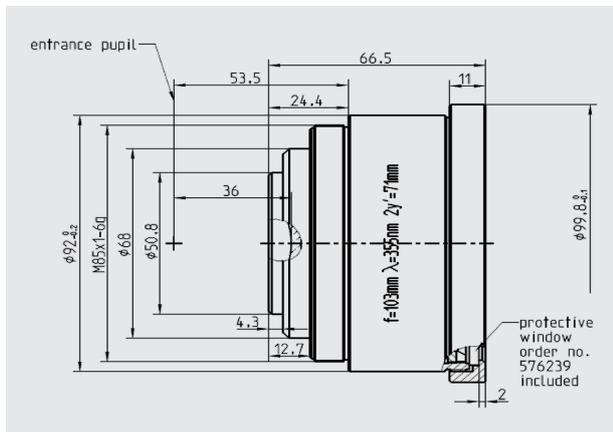

Definition of geometrical parameters

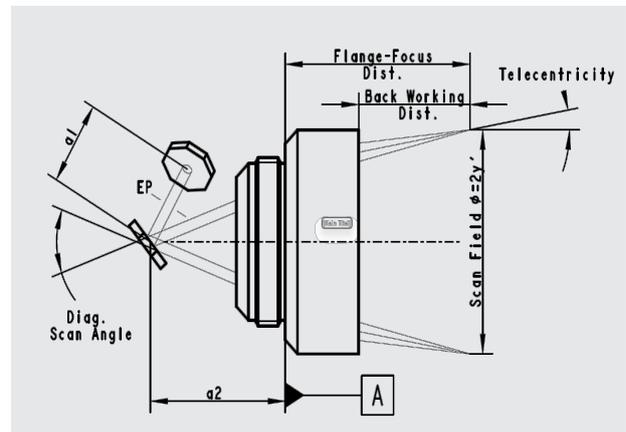

JENar™: Registered in EU, CN, JP, SG, US | F-Theta: Registered in EU, CN, KR, JP, SG, IN, HK, TW | APTALine™: Registered in DE, EU, JP, KR, US, CN

The data given are nominal values for the specified application parameters. Jenoptik provides Zemax® BlackBox files for simulating application results for customized parameters (e.g. wavelength, scanner geometry, beam diameter, ...). Back working distance, Flange focus distance, and focal length vary by ± 1.5 % due to manufacturing variances.

It is our policy to constantly improve the design and specifications. Accordingly, the details represented herein cannot be regarded as final