

MORE LIGHT

Integrated optical phase modulator PMxxx

Waveguide-based electro-optical light modulator

The Integrated Optical Phase Modulator PMxxx is a compact fiber-coupled waveguide-based electro-optical modulator that works based on $\text{MgO}:\text{LiNbO}_3$ and LiNbO_3 crystals. Providing fast electrooptical response, it allows phase modulation with frequencies as high as the Gigahertz range. Available modulators can handle wavelengths in the visible and the infrared spectral range.

Standard-designed modulators use polarization maintaining single mode fibers to couple the light in and out. They may also be configured with fiber systems or connectors of different types.

Benefits

- Application in the VIS or IR spectrum
- High modulation frequencies
- Single mode fiber coupling
- Low modulation voltage

Applications

- Analog and digital modulation
- Sideband generation
- Interferometric metrology
- Optical coherence tomography

Waveguide-based electro-optical light modulator


Integrated optical phase modulator PMxxx

Specifications

	PM635	PM705	PM830	PM1064	PM1550
Wavelength [nm] Other wavelengths on request	635	705	830	1064	1550
Spectral bandwidth [nm]	± 20	± 20	± 30	± 40	± 50
Insertion loss, typical [dB]	6	5	5	4	3
Minimum optical rise time 10/90, typical	200 ps	200 ps	200 ps	200 ps	200 ps
Optical connection, input Standard Fiber connector	Polarization maintaining single mode fiber* Bare fiber, FC/PC connector or FC/APC connector**				
Optical connection, output Standard Optional Fiber connector	Polarization maintaining single mode fiber* Single mode or multi mode fiber Bare fiber, FC/PC or FC/APC connector**				
Half wave voltage, typical	5 V	5 V	4.5 V	6 V	10 V
Maximum optical input power (cw)	20 mW	20 mW	30 mW	300 mW	300 mW
Dimensions L x W x H (housing, without fiber feed-through)	96 mm x 19 mm x 10 mm				

* Standard: bow-tie-type, optional: Panda-type

** Standard: wide-key connector, optional: small-key connector

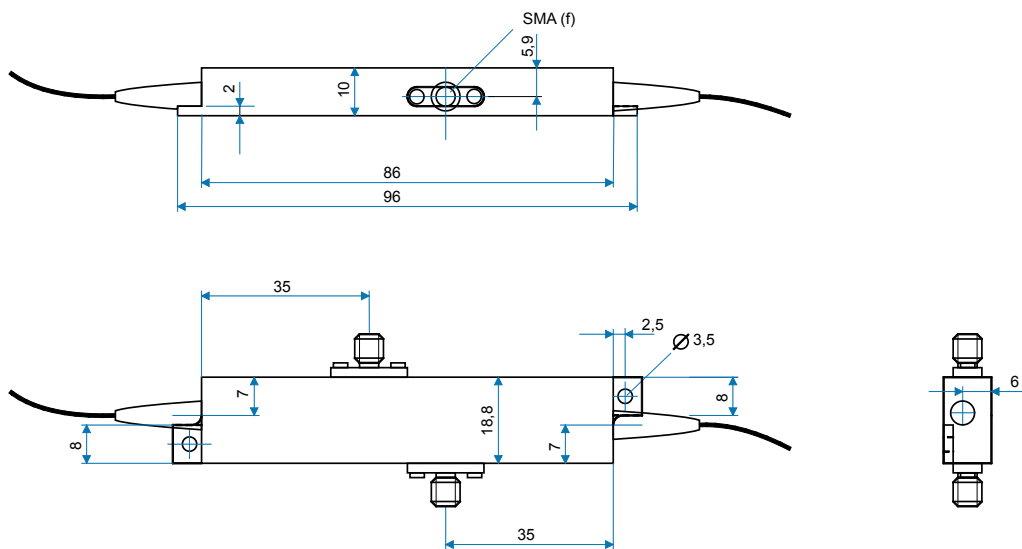

Dimensions phase modulator (mm)

It is our policy to constantly improve the design and specifications. Accordingly, the details represented herein cannot be regarded as final and binding.